



Czech Technical University in Prague

Dept. of Mechanics, Biomechanics and Mechatronics

PragTic

Use of Finite Element Analysis Data in Fatigue Analyses


Jan Papuga

Workshop on Computational Fatigue Analysis 2008 & 2nd PragTic Users' Meeting

Kamenice nad Lipou, Czech Rep., Oct. 29-31, 2008

Software PragTic

- Started as a support tool for preparation of my PhD thesis
- Present focus: research tool usable for fatigue computation
- Freeware (www.pragtic.com)
- MS Windows based
- English interface only
- v.0.2beta - v.0.2betaD
development sponsored
by Evektor
- Previous versions
sponsored by CTU in
Prague

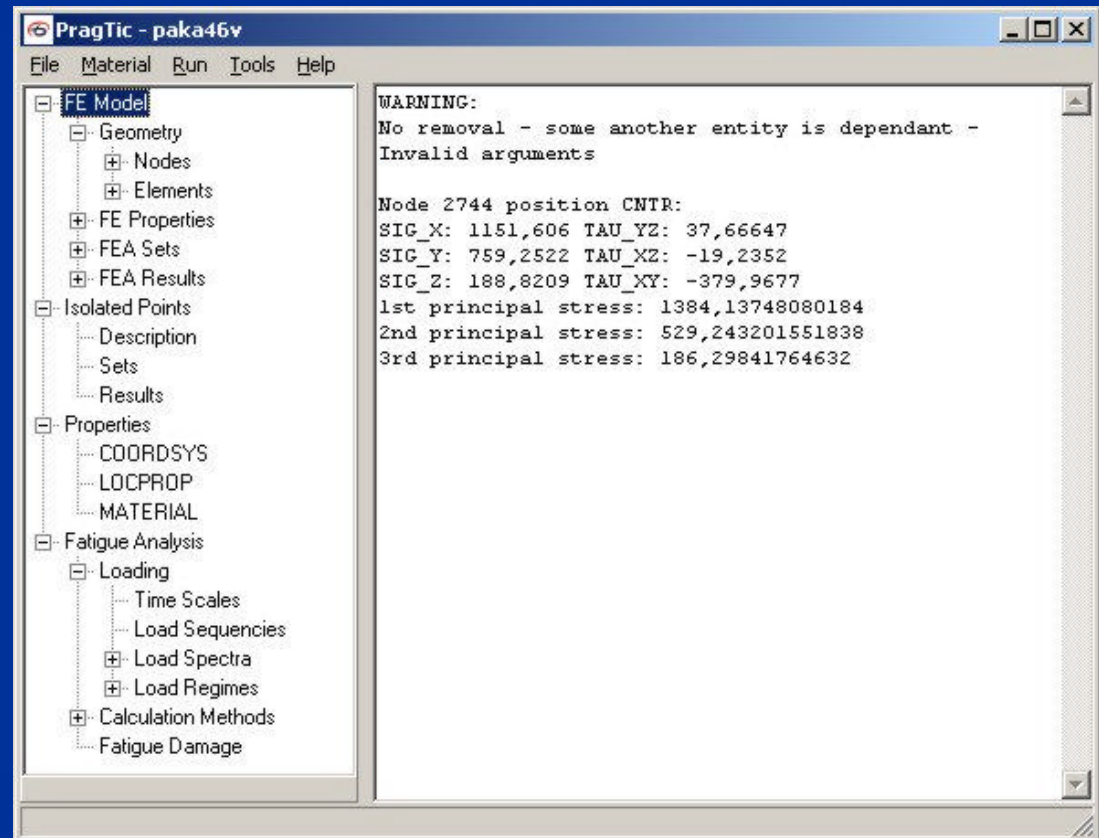


PragTic Features

- Works on data
 - of FE-model
 - at isolated points with no relation to any FE-model (strain gauges)
- Own database of all data processed
- Preparation and analysis of loading by more load channels
- Easy to use graphical interface
- Complex setup of calculation methods
- Unique coverage of multiaxial methods
- Approx. 20 high-cycle and 10 low-cycle fatigue computation methods


Fatigue Calculation on FE-Model

Essentials

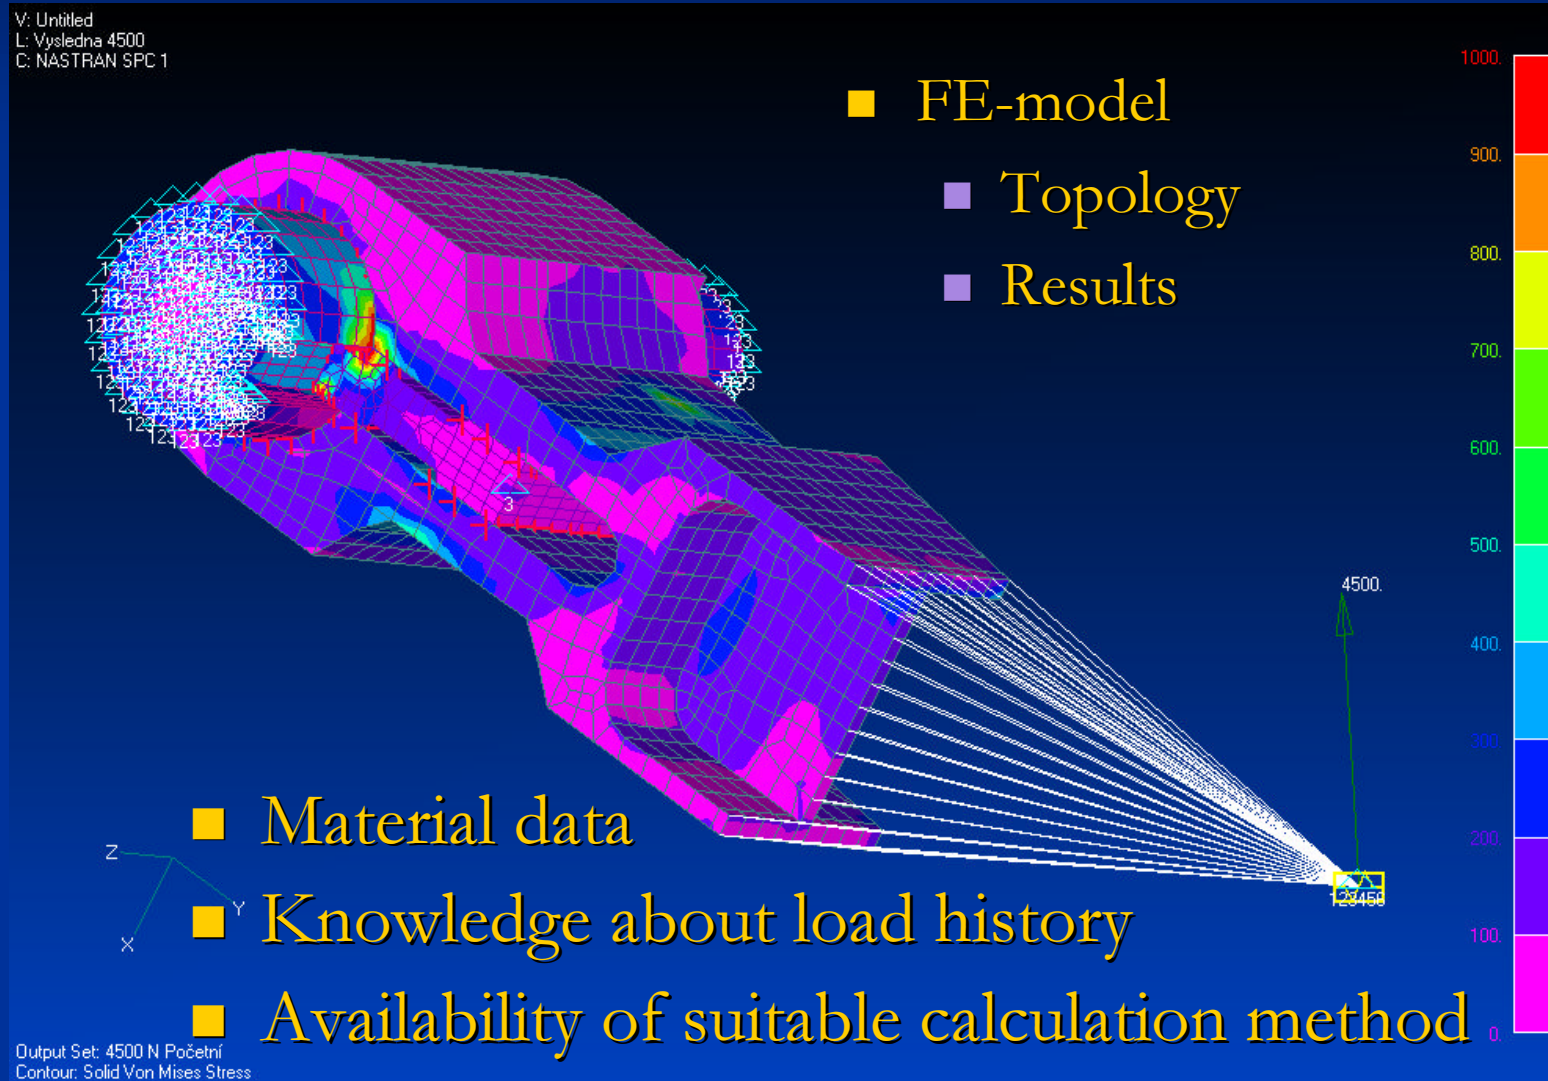

FEM-Model Requirements

- Adequately detailed mesh around the critical localities
- Use the submodel of the critical place if available
- Some rough rules:
 - A quarter of circle ~ 5 elements
 - Avoid linear tetrahedrons
 - At least three elements over the thickness, otherwise shells

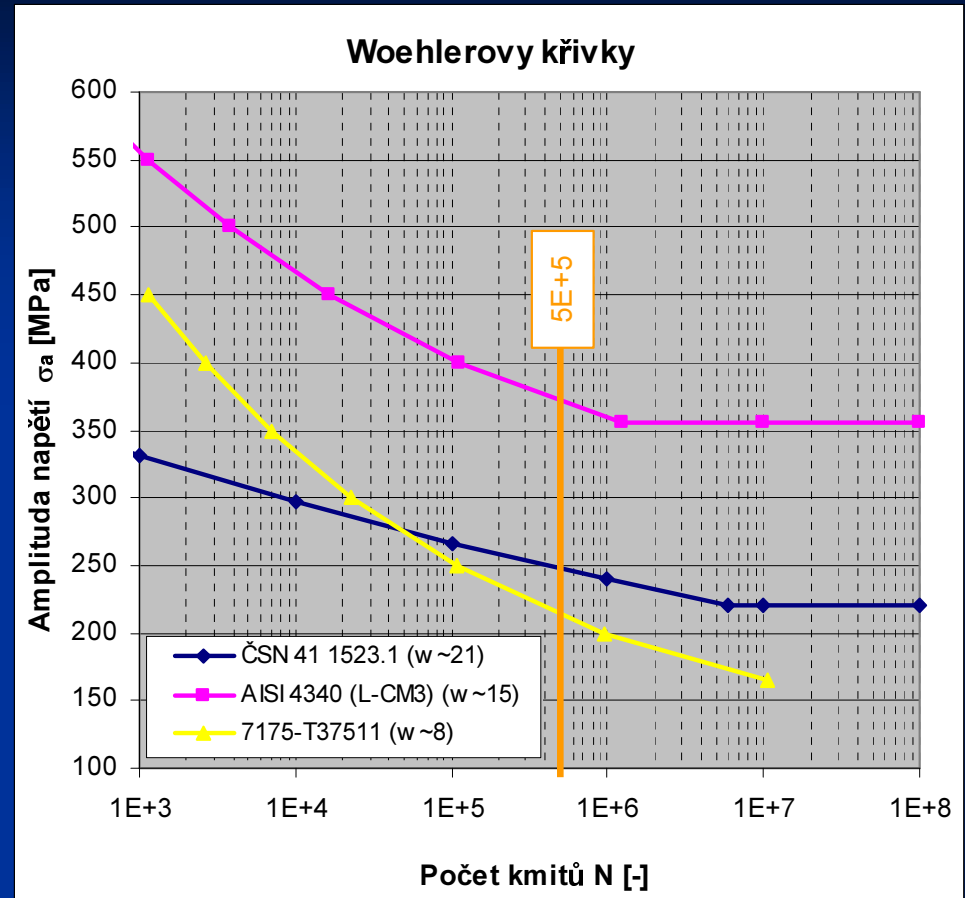

Load increase	Decrease of fatigue life		
	ČSN 41 1523.1	AISI 4340	7175-T37511
0%	100%	100%	100%
2%	66%	67%	82%
5%	36%	38%	62%
10%	13%	17%	39%

Use of Result Data – Part I

■ Results can be printout at

■ nodes of elements

- can be significantly discontinuous (coarse meshes)
- the measure of conservativeness can be doubtful

■ integration points


- the only “exact” values

■ nodes as averaged value

- smooth in comparison to nodes of elements
- the same results on edges

■ element centroids

- used e.g. in FemFat on shell elements and welds (the load values on edges are not decisive – structural stresses)

- 
- more points to be analyzed
 - much slower calculation

Use of Result Data – Part II

■ Shell elements

- obvious demand by the most of industrial partners (automotive, airplane, transport, etc. industry)
- further complication as regards listing – results on top and bottom sides
- questionable results at typical crack initiation areas – junctions, toes, etc.
 - these localities are moreover often affected by welds
 - use of results at element centroids should be preferred

■ Bar elements?

- does the computation make sense?
- description of potential notches on elements close to zero (if not input e.g. in the fatigue post-processor)
- notches at junctions are not described in acceptable detail

Data Import to PragTic

■ FE-data

- commonly formatted (rows & columns) ASCII file (solid elements only)
- MSC.Nastran (*.nas/*.dat files - topology, *.pch – FE-results)
- ABAQUS (ASCII file *.fil) – suspended at present (is there anybody to sponsor it?)

■ Isolated points

- direct input through the PragTic's interface expected
- possibility to import as a commonly formatted ASCII file

■ Other entities

- load regimes, calculation methods – possibility to read data from other PragTic's tasks

Example of ANSYS Input

Operations done in points 1-6 can be saved and read during any future import on a similar data structure

The screenshot shows the ANSYS File Recognition dialog box. The 'Source' field is set to 'C:\Documents and Settings\Honza\Dokumenty\texty\'. The 'Separators' section has 'hard' selected, with checkboxes for '<space>', '<tab>', and 'other:'. The 'Content' section has 'nodes' selected. The 'Read Map' and 'Save Map' buttons are highlighted with a yellow box. The 'Run Scan' and 'Upload' buttons are also highlighted with yellow circles and numbers 7 and 8 respectively. The 'File Recognition' window shows a list of nodes with columns for 'NODE', 'X', 'Y', and 'Z'. A context menu is open over the data, with options like '1. Item description', '2. Header lines', '3. First data line', 'Place separator', and 'More rows...'. A 'Separators' dialog box is also open, with a yellow circle and number 3. The 'Map' table at the bottom shows the mapping of columns to variables, with a yellow circle and number 5. A second 'Map' table is shown below it, with a yellow circle and number 6. The 'Run Scan' button is highlighted with a yellow circle and number 7, and the 'Upload' button is highlighted with a yellow circle and number 8.

1 File recognition

Source: C:\Documents and Settings\Honza\Dokumenty\texty\

Separators:

automated hard

<space>

<tab> <,>

other:

fixed width:

Content

nodes

elements

isolated points

results

load history

Read Map

Save Map

Reset

7 Run Scan

8 Upload

Help

Row: 4, Col: 26

LIST ALL SELECTED NODES. DSYS= 0

Sort TABLE ON NODE NODE NODE

NODE	X	Y	Z
1	0.21382E-02	0.1	
2	0.71382E-02	0.1	
3	-0.23655E-03	0.1	
4	0.23830E-02	0.1	
5	-0.42648E-02	0.1	
6	-0.58499E-02	0.1	
7	-0.71116E-02	0.8	
8	-0.80284E-02	0.56687E-02	0.70000E-02
9	-0.85847E-02	0.28586E-02	0.70000E-02
10	-0.87712E-02	0.14140E-14	0.70000E-02
11	-0.85847E-02	0.28586E-02	0.70000E-02

Column From To Count Variable Position

Column	From	To	Count	Variable	Position
1	0	8		General Item	
2	8	22		General Item	
3	22	34		General Item	
4	34	46		General Item	
5	46	55		General Item	
6	55	63		General Item	
7	63	70		General Item	

5

Node IDs

X-coordinate

Y-coordinate

Z-coordinate

Definition CS

Result CS

Normal in X

Normal in Y

Separators

Set the separators now by right-hand click on chosen positions

OK

3

4

ALL SELECTED NODES. DSYS= 0

Sort TABLE ON NODE NODE NODE

NODE	X	Y	Z
1	0.21382E-02	0.1	0.70000E-02
2	0.71382E-02	0.1	0.70000E-02
3	-0.23655E-03	0.1	0.70000E-02
4	0.23830E-02	0.1	0.70000E-02
5	-0.42648E-02	0.1	0.70000E-02
6	-0.58499E-02	0.1	0.70000E-02
7	-0.71116E-02	0.8	0.70000E-02
8	-0.80284E-02	0.56687E-02	0.70000E-02

1. Item description

2. Header lines

3. First data line

Place separator

More rows...

6

Column	From	To	Count	Variable	Position
1	0	8		Node Headers	
2	8	22		Node Coordinates	X
3	22	34		Node Coordinates	Y
4	34	46		Node Coordinates	Z
5	46	55		General Item	
6	55	63		General Item	
7	63	70		General Item	

FE-Model Description


- Topology data
 - **Node** description (ID, coordinates)
 - **Element** description
 - ID
 - Related **material**
 - Related **element group**
 - Related **real constants**
 - Related **coordinate systems** (definition, output)
 - Related nodes (element table of incidencies)
- Result data



Data Structure of Tasks in PragTic

- hard-disc representation
 - *.fdb file with description of the task (data_base)
 - directory * (the same name as the task) full with binary files of individual items in the data_base (data_vectors)
 - each file consists of data of uniform type and length
- memory representation
 - data_base – specialized data_vector describing complete content of the task
 - data_vector
 - class build around the data read from files
 - data are cached, read only their part, not the whole file
- PragTic interface representation

Interface

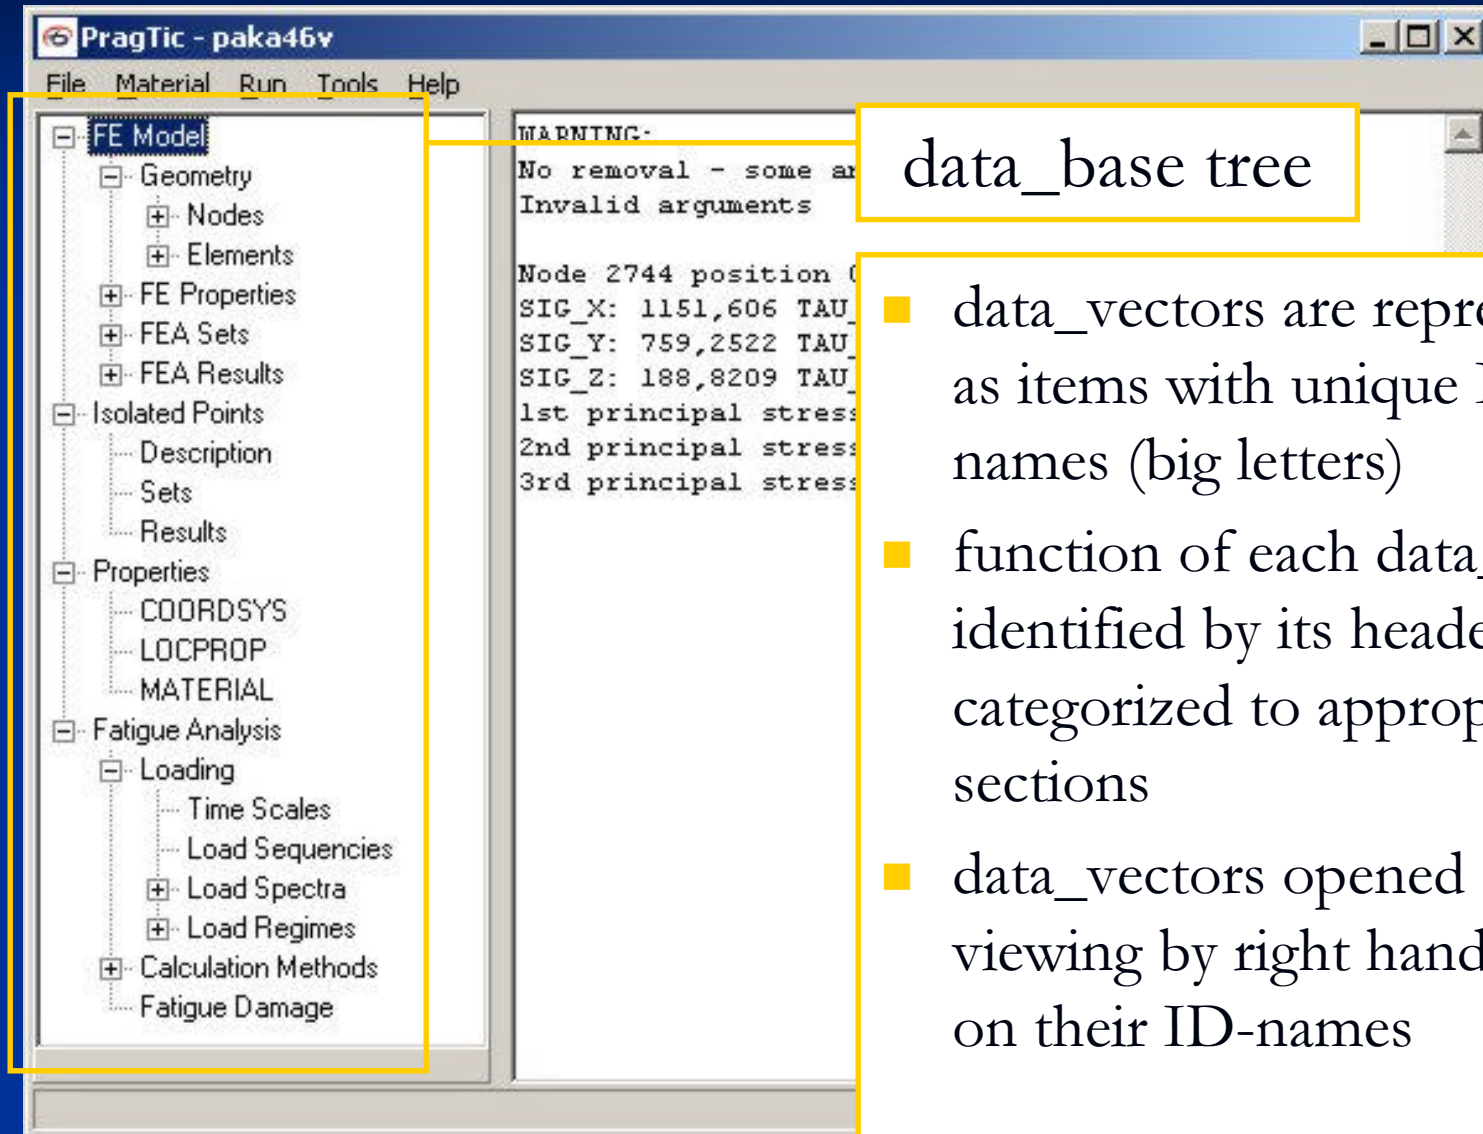


data_base tree

- data_vectors are represented as items with unique ID-names (big letters)
- function of each data_vector identified by its header and categorized to appropriate sections
- data_vectors opened for viewing by right hand click on their ID-names

Interface II – Popup Menu

When
complete:

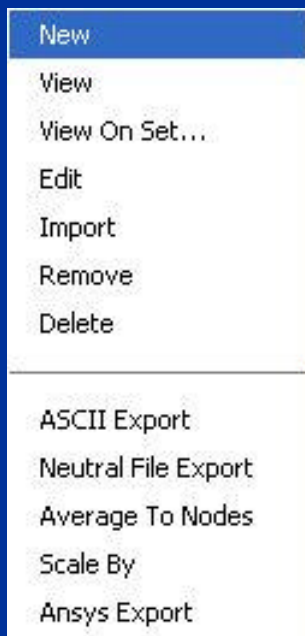


- Opened by a click on the right mouse button
- Differs for various selected items
- **Remove** command
 - removes the data_vector from the task, but leaves the file representation on the hard-disc
- **Delete** command
 - removes also the file
- **Note:** Some data_vector serve as a synergic part of another data_vector – you will be warned that the delete/removal is forbidden

Interface III

Main menu


Report window
– errors, warnings,
output of some
commands

Status bar - reports on
current calculation results

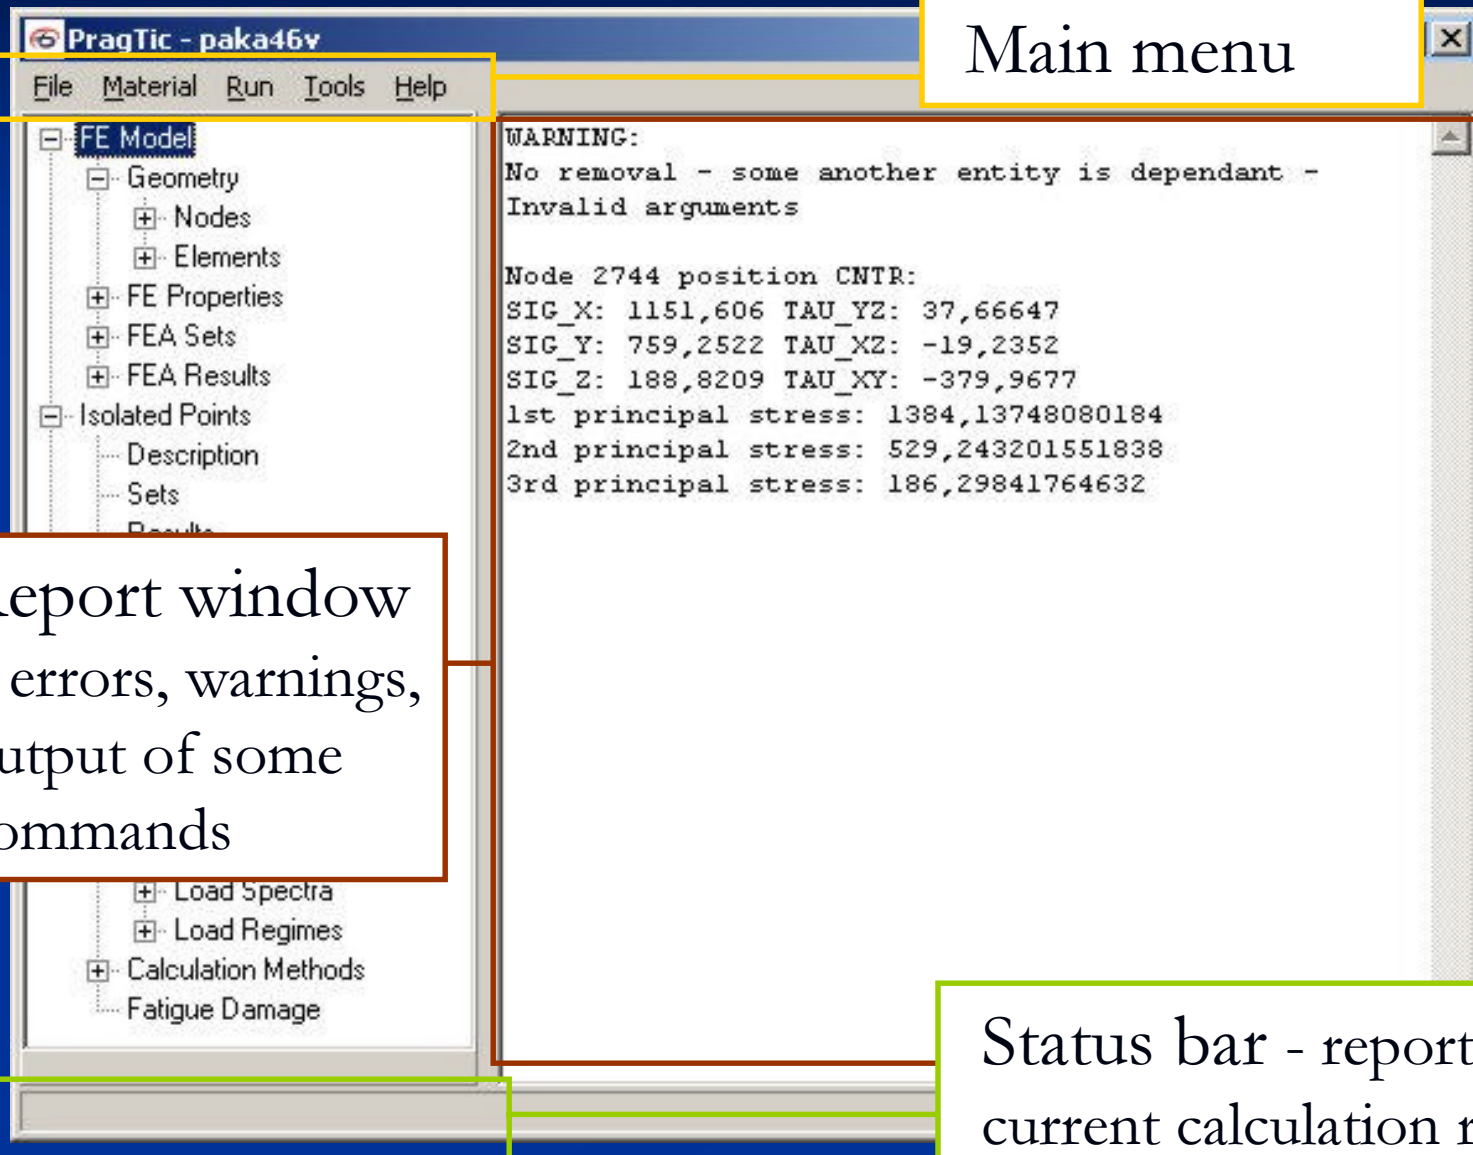

Data Items Differentiation

- Each data_vector has a header at its beginning, where are among others data on:
 - Its meaning (e.g. Stress, Strain, Nodes, etc.)
 - Related location (e.g. variable described at element centroids)
 - Number of items, dimension of one item
 - Related sets (e.g. nodal)

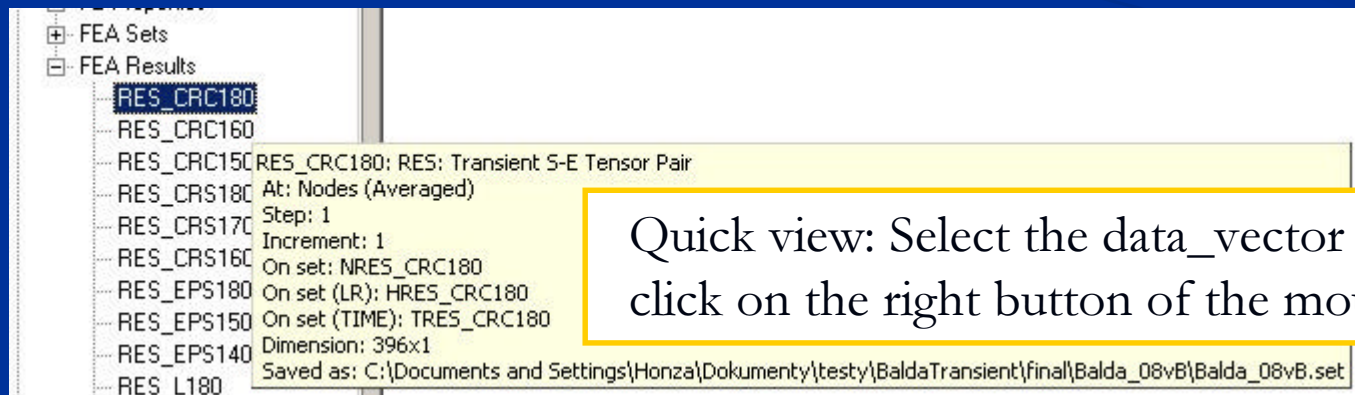

Quick view: Select the data_vector and then click on the right button of the mouse

View / Edit Window – Type I

- Description of elements, nodes, isolated points, sets, results, loads
- Use of clipboard enabled
 - Ctrl+C (or the command from the right-hand click menu) for View mode
 - Ctrl+V (or the command from the right-hand click menu) for Edit mode
- **Fast ASCII Copy** – copies whole content of the table to a file, using the tabulators and enters as separators
- **Filter** – see its strength on the next slide

View RES_CRC180 Item

Item: RES_CRC180 Dsc: RES: Transient S-E Tensor Pair On set: NRES_CRC180

Location: at nodes Time scale: TRES_CRC180

Line	Node	Position	Time	SX	SY	SZ	SYZ	SXZ	SXY	EX
1/1	166	CNTR	158	0,00272876	-0,492274	-2,1483	171,308	-1,30547	0,0425088	2,18529E-5
1/2	166	CNTR	162	0,0061568	-0,486222	33,0		-1,27011	0,0387773	-2,66926E-5
1/3	166	CNTR	166	0,00628214	-0,490158	67,0		-1,13945	0,0388644	-7,20206E-5



Fast ASCII Copy... Filter... Close Help

SZ - Stress ZZ

Note the hints

View / Edit Window – Type I Filter

- Filtering can be used in a consecutive series
- Leaves only data
 - belonging to specified set
 - with specific values in the chosen column

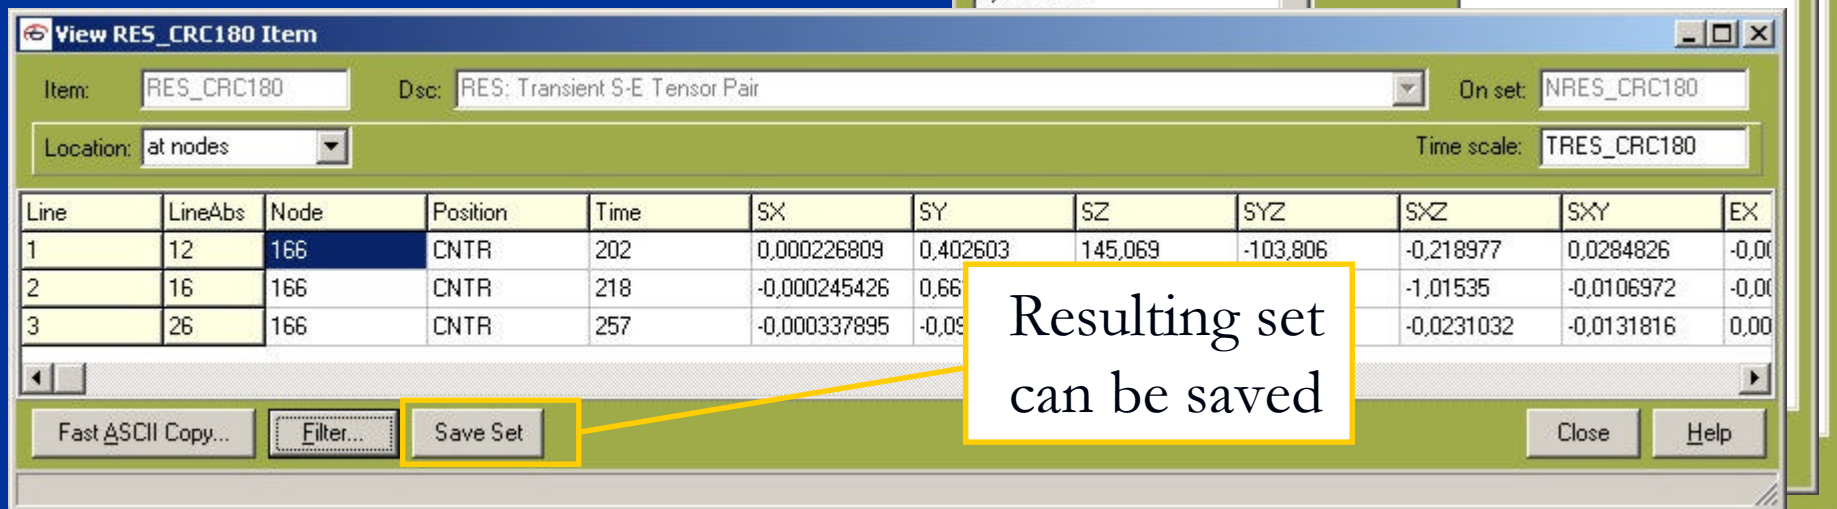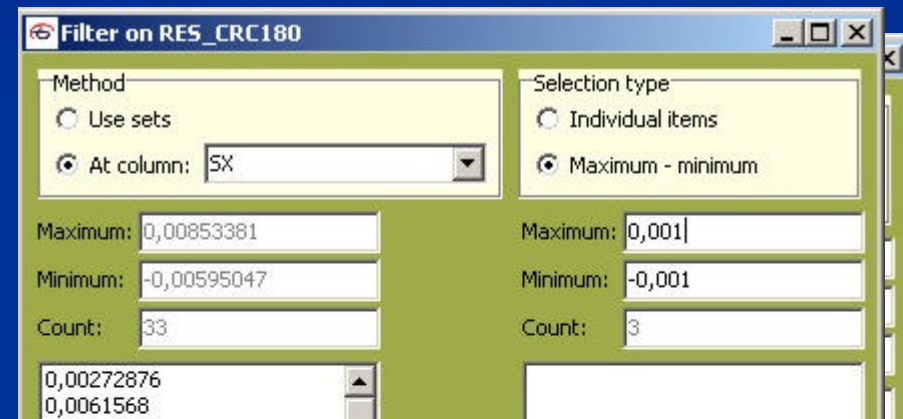


View / Edit Window – Type II

- no command *Back* or *Undo*, every *Save* is final
- not *Saved* changes can be returned back by the *Skip*
- Changing the ID-name to a new one and save is not equal to rename but to a copy to a new item


individual items

edition of each item in the data_vector (load regimes here) has to be finished by *Save* if you want to continue to another one

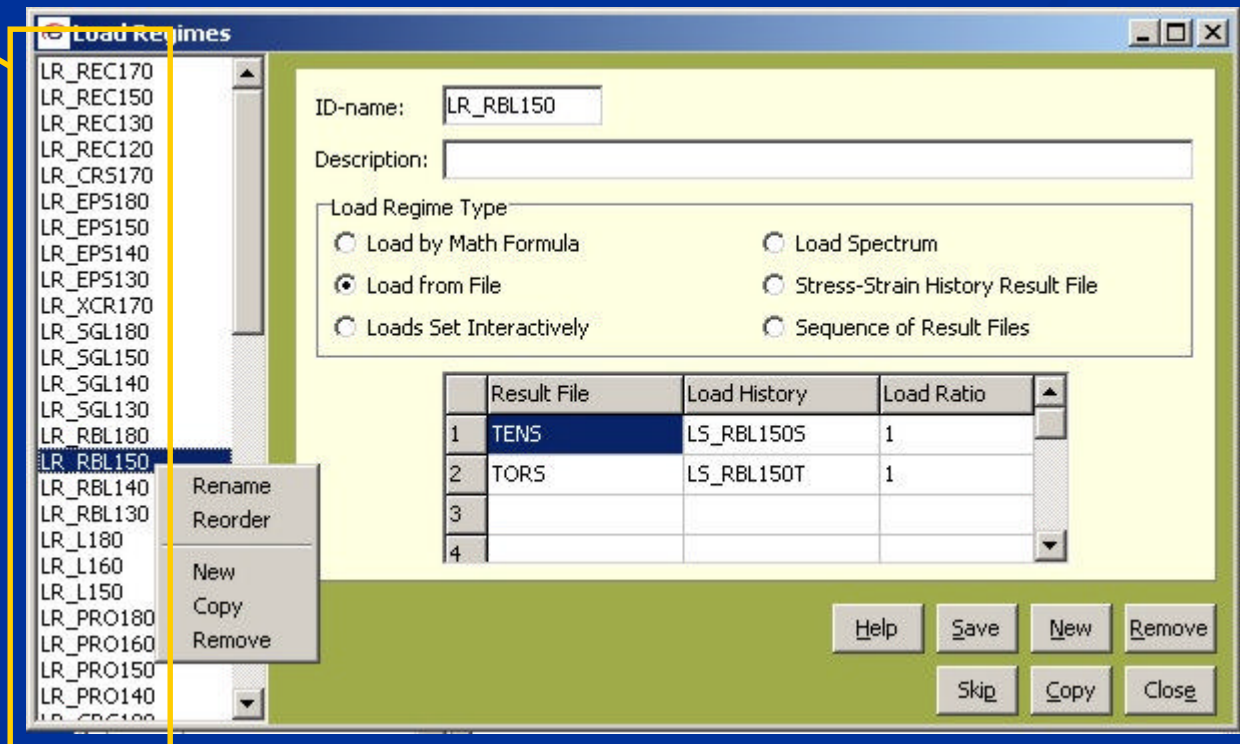


View / Edit Window – Type II

- Popup-menu enabled only for Edit mode
- Some items in the Command menu enabled also in View mode
- **Reorder:** Currently enabled only for Load Regimes and Setups of Analyses

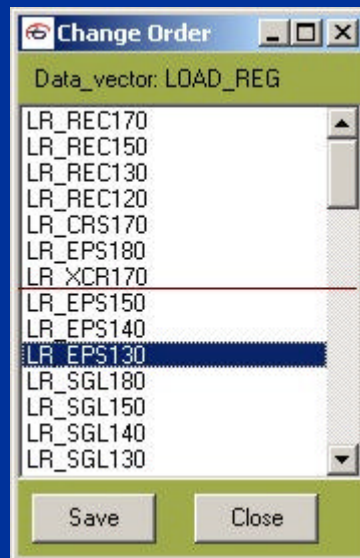


Popup-menu

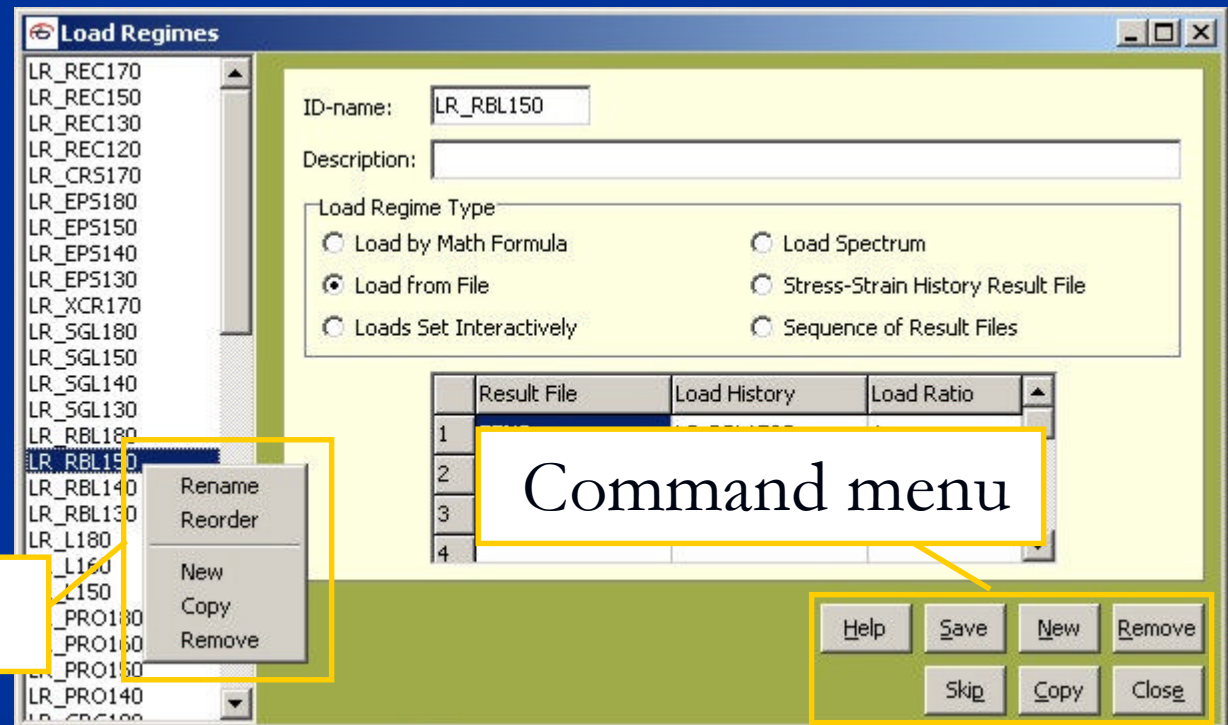

View / Edit Window – Type II

- Apply to set button
 - Enables correction of FE-model properties, if they were inadequately imported to PragTic

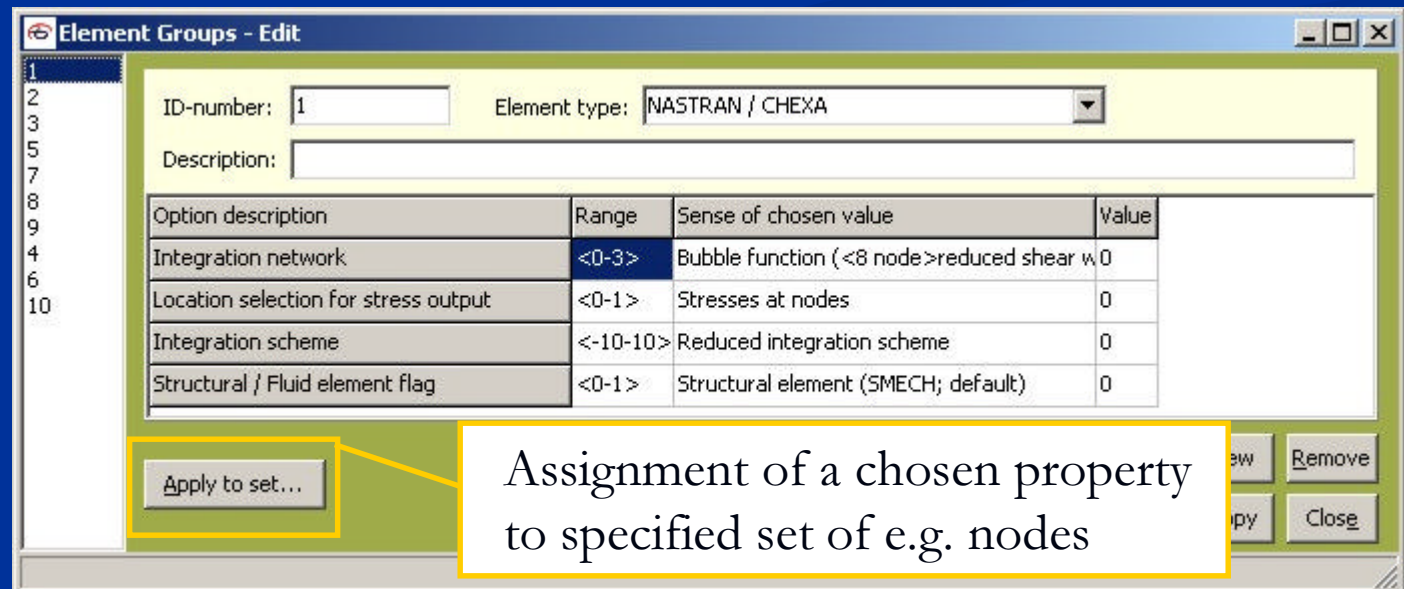

Loads Description

■ Load Regime (**LOAD_REG**)

- a combination of all entities necessary for creation of local load histories
 - extern load history + FE-results file + knowledge of load applied to the FE-model
 - local load history in hte FE-result file = transient analysis

■ extern loads (Hooke)

- math formula
- load by data sequence
- load spectrum / rain-flow matrix

■ transient analysis (no Hooke)

- local load history read from FE-solver (ABAQUS)
- **In preparation:** buildup of transient analysis from a sequence of FE-results

Load Regimes

TOMAX
TOMAX_EN
SYM
SYM_AT_N

ID-number: TOMAX
Description: elemental stresses

Load Regime Type

Load by Math Formula Load Spectrum
 Load from File Stress-Strain History Result File
 Loads Set Interactively Sequence of Result Files

	Result File	Load History	Load Ratio
1	RESE	LHAMP	1
2			
3			
4			
5			

Help Save New Remove
Skip Copy Close

Loading

■ Linear FEA

- The individual load channels can be combined by simple superposition
- If the resulting loads pass over the yield limit, some kind of reduction to elastic-plastic value can be necessary

■ Non-linear FEA

- No superposition allowed
- More challenging way due to necessity to include all the interacting channels and contacts into one model


Load History Definition

- Transient analysis – local loads over the structure
- History of the acting load – must be in a known relation to the load acting on the FE-model
 - real record (time – force)
 - mathematical formulation
 - load spectrum (upper force – lower force – occurrence)
 - load spectra as e.g. required by standards
 - rain-flow matrices

Load Input to PragTic

- Use of the **Import** function from the main menu
- Creation in PragTic (**New** command at the right-hand click menu opened on **Time Scales, Load Sequencies** and **Load Spectra**)


- direct editing
- use of Copy and Paste function (Ctrl+V) at the void cells of Edit window – be sure that the size of the clipboard and the edit window coincide

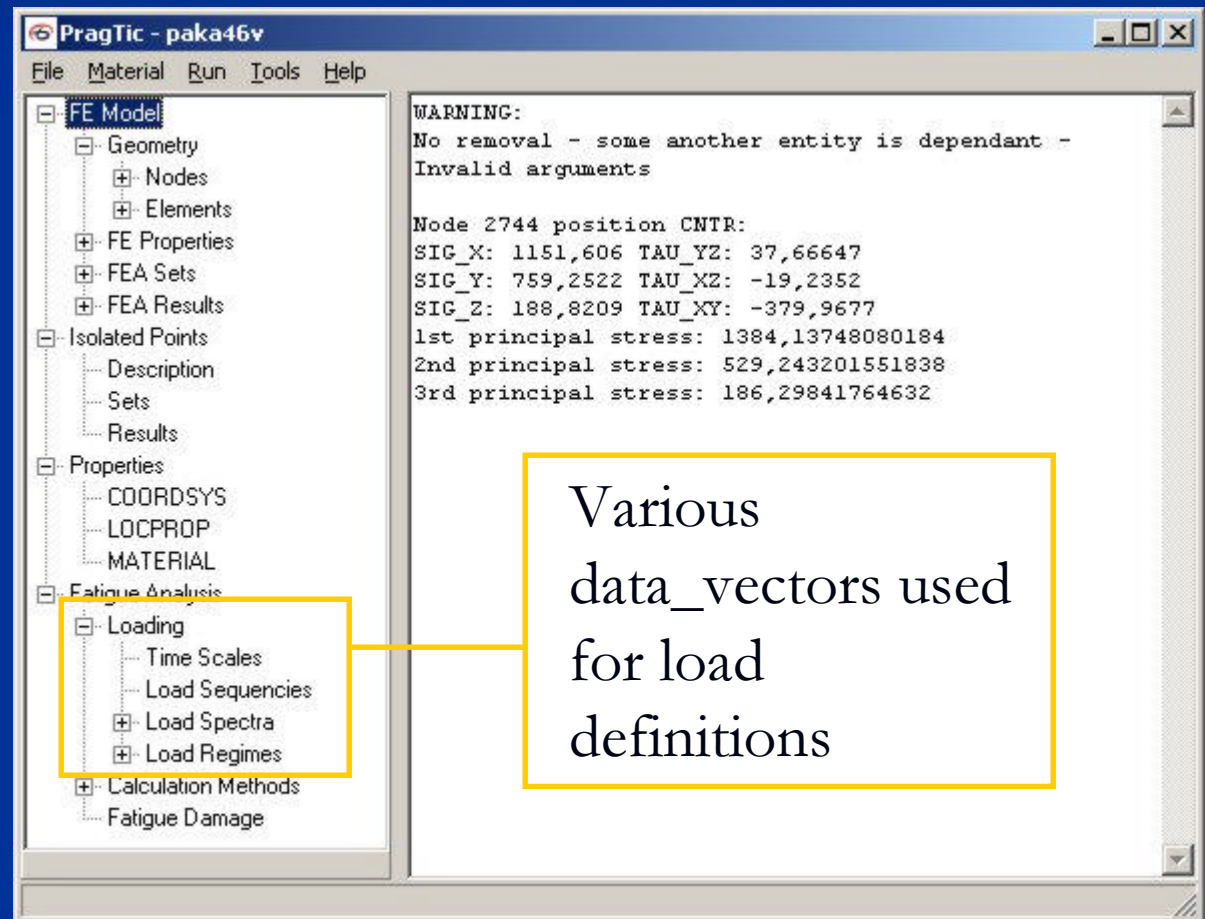

Load Scaling

■ Optimum setup:

- FEA solution for unit load (e.g. 1 N, 1 kN, etc. – something with what can be easily worked further)
- FEA result input for a desired load
 - e.g. the load equal to the load amplitude
 - not so handy for further modifications

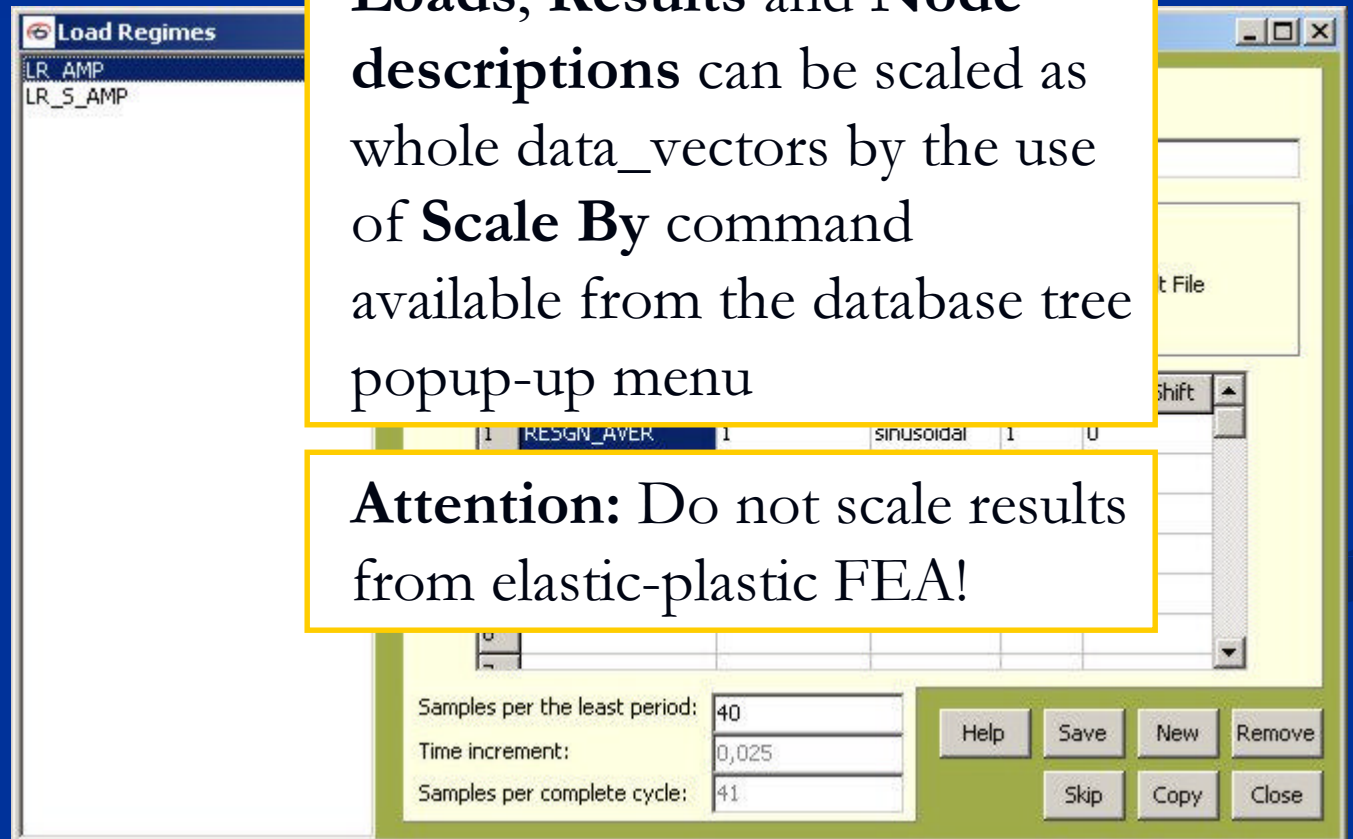

The screenshot shows a software interface with a 'Load Regimes' table and a 'Scale By' command menu. The table has columns for 'LR AMP', 'LR_S AMP', 'RESGN_AVER', 'sinusoidal', and 'U'. The 'Scale By' menu is open, showing options for 'Scale By' and 'Scale By'.

LR AMP	LR_S AMP	RESGN_AVER	sinusoidal	U
		1	1	0

Scale By

Samples per the least period: 40

Time increment: 0,025

Samples per complete cycle: 41

Help Save New Remove

Skip Copy Close

Loads, Results and Node descriptions can be scaled as whole data_vectors by the use of **Scale By** command available from the database tree popup-up menu

Attention: Do not scale results from elastic-plastic FEA!

Setup of Calc

Check before any calculation that the M.P.s. are defined for all materials included into the selected calculation scope

1. Selection of the method affects the content of combo boxes below as well as of all the tables

2. Selection of this partial procedures affects the content of the tables

Only the material parameters necessary for selected setup of the method are shown

Recommended values of coeffs - C_SOCCT 3.2 & C_SOCCS 0.7

Socie: Socie Material: 0

Material parameters	Value
E	210000
NU	0,3
SIG_YLD	334,5
SIG_F	1009,2
TAU_F	582,7
EPS_F	0,922
GAMMA_F	1,597
EXP_B	-0,0927
EXP_C	-0,659
C_SOCCT	2,5
C_SOCCS	0,5
G	76923

Searched planes <0~BS, 1~globe, 2~random, 3~N only> 0

Number of scanned planes 180

Shear component description <0~MCCM, 1~LCM, 2~by normal line, 3~M2 1

Value

1E-20

1E-8

0,5

Help Save New Remove

Skip Copy Close

Transient Analysis


- Local load history built for cases, where the linear Hooke's law is not valid
- Two ways of creation
 - local load history recorded for each node/element
(FE-postprocessor builds the transient analysis)
 - set of results at different times chained together
(fatigue solver builds the transient analysis)

Transient S-E Tensor Pairs (SET_Pair item) are placed to the Results / FEA Results groups and not to Loads

Material Parameters

(**MATERIAL**)

- Even a complete import of the FE-model e.g. from *.nas file provides only several static parameters
- Material definition common also with Isolated Points – it should precede before their definition
- Material parameters definition opened from:
 1. **MATERIAL** ID-name of data_vector
 2. **Material** item of the main menu
- Some material parameters preset in dependency on the chosen material group
- **Note:** Use of a decimal comma or dot depends on your local Windows setup

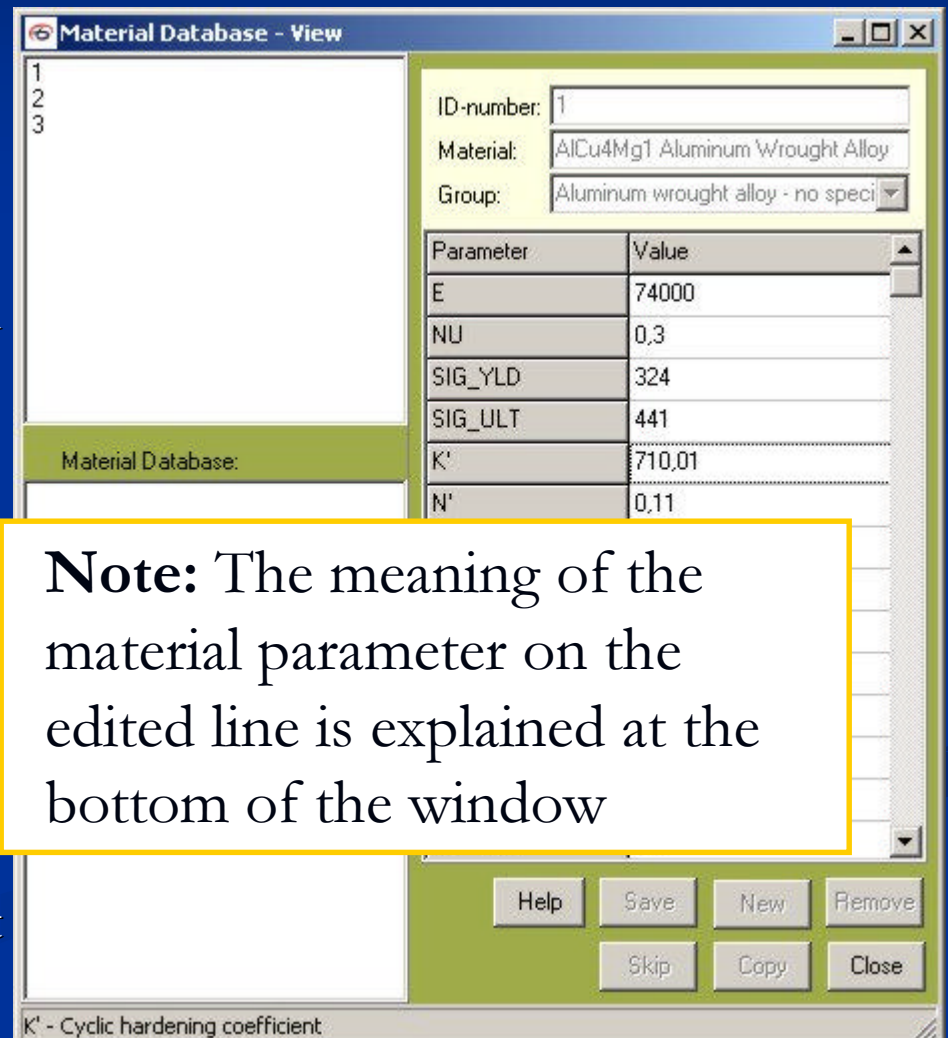

Eventual Setup of Material Parameters

- Use the Methods dialogue
- You are not defining the setup of methods, i.e. Methods can be opened even in the otherwise passive View mode
- You can see much more efficiently, which material parameters you really need in order to get to results
- Any your change of a table cell starts a dialogue asking whether to save your input into the Material data_vector

The screenshot shows a software interface with a table of material parameters and a dialog box. The table is titled 'Material parameters' and has two columns: 'Material parameters' and 'Value'. The parameters listed are E, NU, SIG_YLD, SIG_F, TAU_F, EPS_F, GAMMA_F, EXP_B, EXP_C, C_SOCCT, C_SOCCS, and G. The values are 210000, 0,3, 334,5, 1009,2, 582,7, 0,922, 1,597, -0,0927, -0,659, 2,5, 0,5, and 76923 respectively. A dialog box titled 'Query on saving' is open, asking 'Save EPS_F=0,922 to the material "0"?'. The dialog box has 'Yes' and 'No' buttons.

Material parameters	Value
E	210000
NU	0,3
SIG_YLD	334,5
SIG_F	1009,2
TAU_F	582,7
EPS_F	0,922
GAMMA_F	1,597
EXP_B	-0,0927
EXP_C	-0,659
C_SOCCT	2,5
C_SOCCS	0,5
G	76923

Setup of Calculation Methods (METHODS)

Methods & Options & Variables of Calculation - Edit

CROSS
SWT
WB2
EICHLSEDER
EICHLSEDERB

ID-number: EICHLSEDERB
Description:
Method: (LESA) - not finished Material: 1 - AlSi9 F aluminum
Decomposition: Rain-flow with von Mises (signed) reduction
Elasto-plasticity: No
Mean stress influence: No
Influence of stress gradient: Hück (IABG)
Influence of technology: No

Material parameters	Value
E	74000
NU	0,3
SIG_ULT	220
TENS-1	65
W_F-1	12
NC_F-1	10000000
R_AS	0
NU_SG_E	0,3

Properties of Structure

0
1

ID-number: 1
Description: common surface
Roughness: 60 microns smoothed
Chosen technology: case hardened
User defined influence factors:
Char. dimension: 15 circle Diameter: 15

Apply to set... Help Save New Remove Skip Copy Close

Properties of Structure (LOCPROP)

- The dialogue covers facts on the specimens that are included neither in the FE-model nor in material parameters description
 - Surface quality
 - Up to 3 technologies affecting the surface layer
 - Size effect
- Values in text fields override the selected items in comboboxes
- Activated for LESA method only

Properties of Structure

0
1

ID-number: 1

Description: common surface

Roughness: 60 microns smoothed

Chosen technology: case hardened

User defined influence factors:

Char. dimension: 15 circle Diameter: 15

Apply to set... Help Save New Remove Skip Copy Close

Coordinate Systems (COORDSYS)

- New coordinate systems can be defined on basis of other previously defined coordinate systems
- Used both for Isolated Points and the FE-model
- Definition of a new item:

- the values in the first column (nodes, IPs) override the next positions

- 3 rows only define the c.s.

CS definition	At nodes	Global CS: X Axis	Global CS: Y Axis	Global CS: Z Axis
Origin		105	54	0
X Axis		1	0	0
Y Axis		0	1	0
Z Axis		0	0	1


Coordinate Systems

(COORDSYS)

- Thanks to **Apply to set** buttons the c.ss. can be applied to imported data additionally
- **Results, Loads, Node descriptions** can be transformed in the View mode to another c.ss.
- Unsolved yet:
 - The results imported to PragTic could be printout in another c.s.
 - A further data_vector descriptor marking the related c.s. has to be implemented in some next PragTic version
 - The results on shell elements can be defined in their native coordinate systems (i.e. cs intrinsic to every particular element). Note that
 - it should not affect the fatigue calculations
 - but it affects transformations between individual c.ss.


Setups of Analyses (ANA_SETUP)

- Specifies the focus of the calculation:
 - where (localities)
 - on which data (load regimes)
 - by which method (methods)
- Each setup consists of:
 - at least one item from load regimes
 - at least one item from methods
 - at least one set of nodes, elements or isolated points
- Calculations loops
 - for each load regime
 - at each point
 - for each method

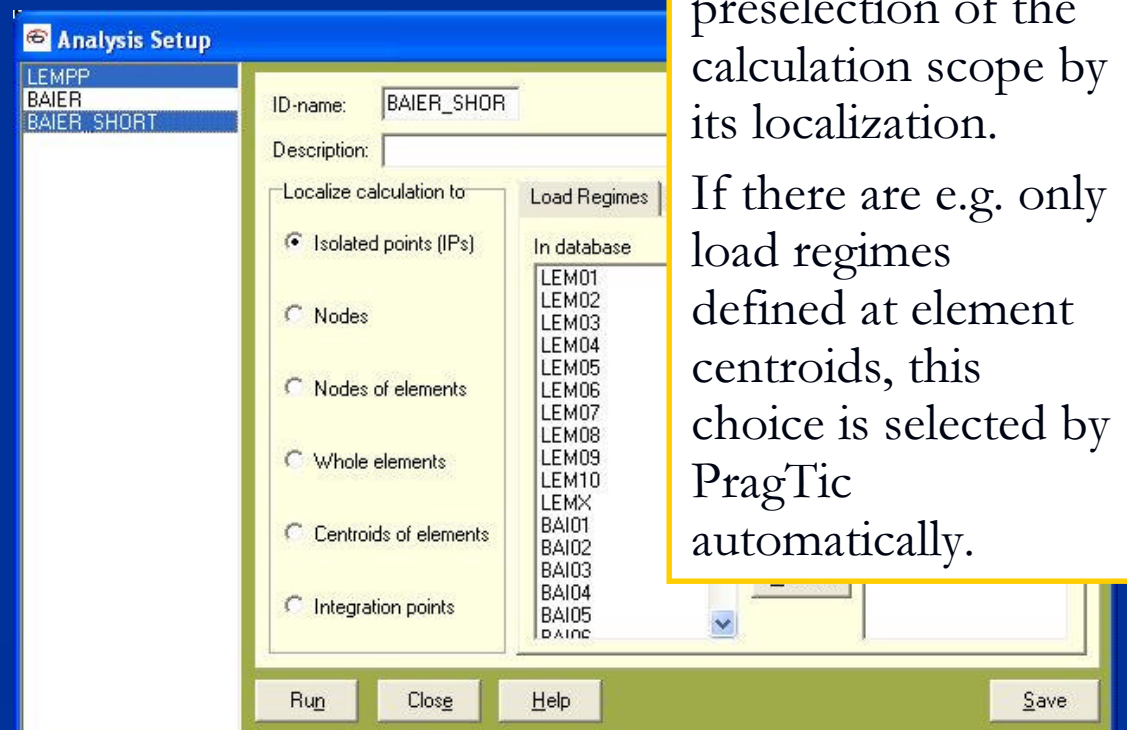

Setups of Analyses (ANA_SETUP)


- Replaces the common **Run** window in PragTic v.0.2betaH

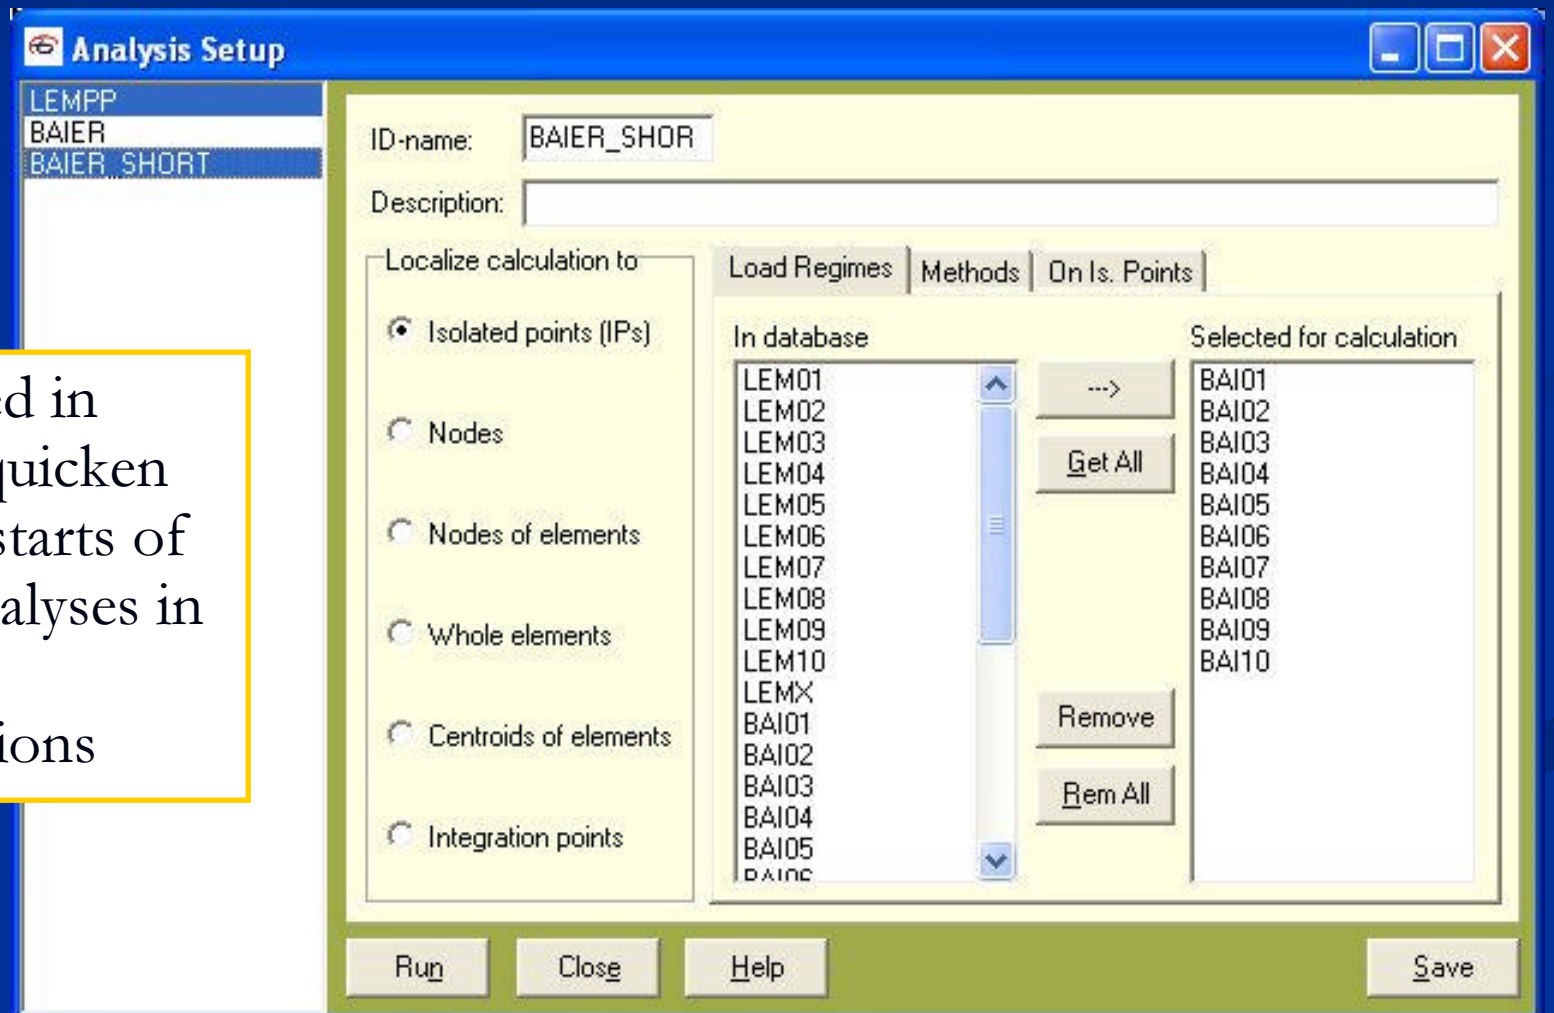

Introduced in order to quicken repeated starts of fatigue analyses in various modifications

Results of Fatigue Calculation

- Spreadsheet summary of damage and calculation related variables
- Graphical interpretation of results:
 - import back to the original FE-post-processor
 - export of fatigue results into a FEMAP neutral file (*.neu)
 - export to a batch file that can be imported to Ansys

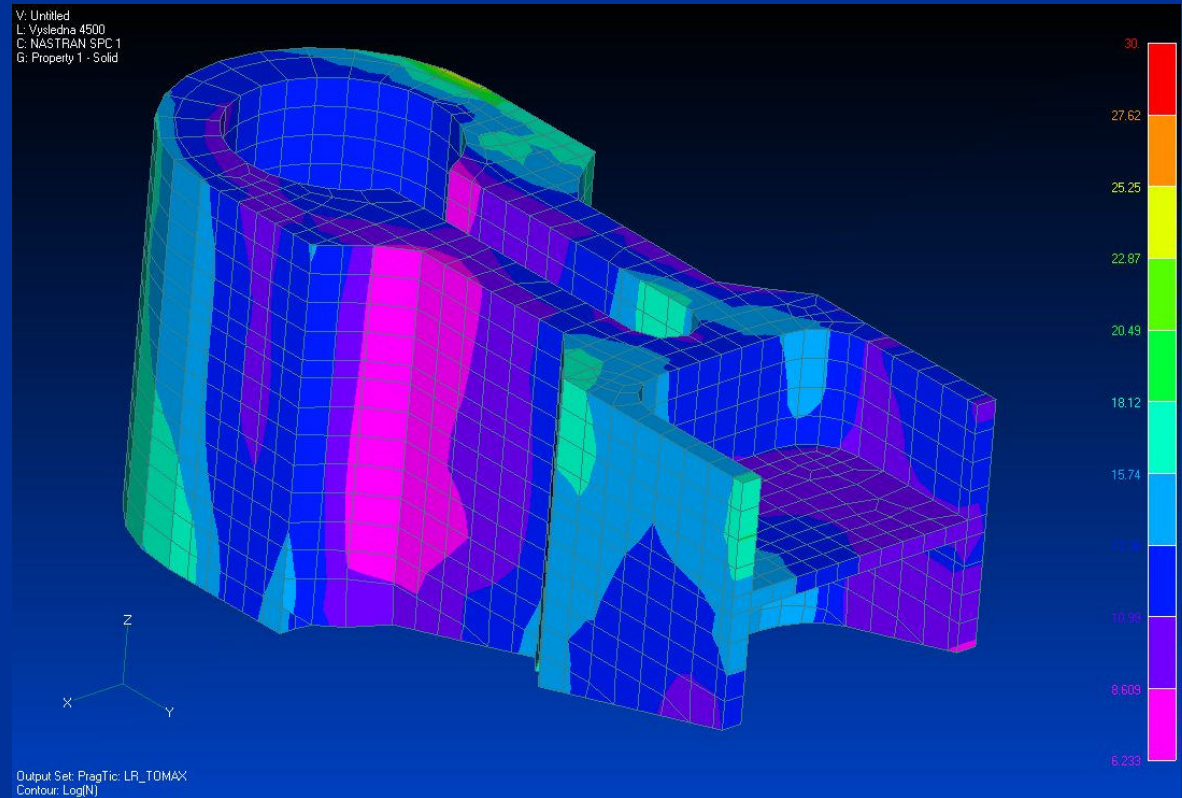

PragTic's Help

- freely downloadable
- created as a context help
- *.chm version
 - common context manual in Windows
 - started from the PragTic's interface (Help buttons?, Alt+H, F1 key)
- *.html version
 - either for download or accessed via Internet (www.pragtic.com)
 - content coincident to the *.chm version
 - does not have Index, thus any search without knowing the structure is problematic

